


## SAT Finder

## SAT-Finder

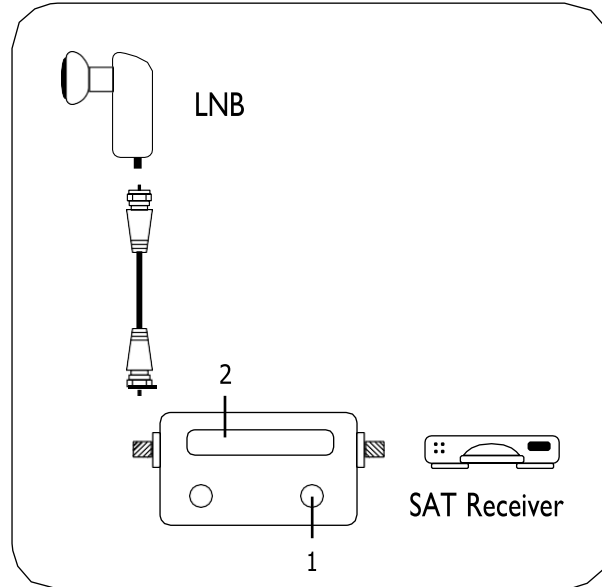

## G Operating instruction

### 1. Safety instructions

- Protect the product from moisture.
- Do not leave the SAT finder permanently installed between the SAT dish and the receiver.
- Take proper safety precautions when working on the roof (risk of falling). If in doubt, contact a qualified technician and do not attempt to mount the product yourself!

### 2. Adjusting the SAT system for the best possible reception using the SAT finder

- Disconnect the SAT receiver from the power supply and connect the SAT finder as shown with the short F cable between the LNB and receiver.
- Reconnect the receiver to the power supply, select a channel.
- Adjust the sensitivity controller (1) until the level jumps.
- Using a protractor and compass, roughly adjust the SAT antenna (SAT dish) according to the desired satellites. Search for the proper satellite by turning and panning the SAT antenna.
- The stronger the incoming SAT signal, the higher the measurement tone that sounds; the level (needle) on the signal strength display (2) also rises from weak "I" to medium to strong "10".
- If the level reaches the maximum of "10", turn down the sensitivity controller (1) until the level shown is reduced.
- Now finely tune the antenna to get as close to the maximum value of "10" as possible.
- Tighten the antenna fasteners.
- **WARNING:** The set value can change again when the screws are tightened.
- On your receiver, check if the desired satellite can now be received.
- You can now remove the SAT finder and reconnect the LNB and the receiver.

Hama GmbH & Co KG  
86652 Monheim /  
Germany

Service &  
Support

www.hama.com

+49 9091 502-0

DG

# **hama**<sup>®</sup>



